


<b>SRC 316</b>		
<b>Center Conductor</b>	CCS	
Dimension in. (mm)	.0201	(.51)
Dielectric	XLPE	
Jacket	PVC (White)	
Min. Inside Bend	in. rad	0.25
<b>Impedance</b>	Ohm	50
Capacitance	pF/ft @ 1 GHz	31
Velocity (propogation)	% of C	66
Shielding	dB	90
Max Voltage	vrms	500
Temperature range	°C	-40 +105
<b>Frequency</b>	<b>Attenuation</b>	<b>Power</b>
	dB/100ft	W
150 MHz	16.2	80
450 MHz	24.5	50
900 MHz	25.8	50
1800 MHz	37.1	10
2500 MHz	45.9	10

All Rights Reserved | © SRC Cables, Inc.  
 5590 Skylane Boulevard, Santa Rosa, CA  
 (707) 573-1900; [info@src-cables.com](mailto:info@src-cables.com)

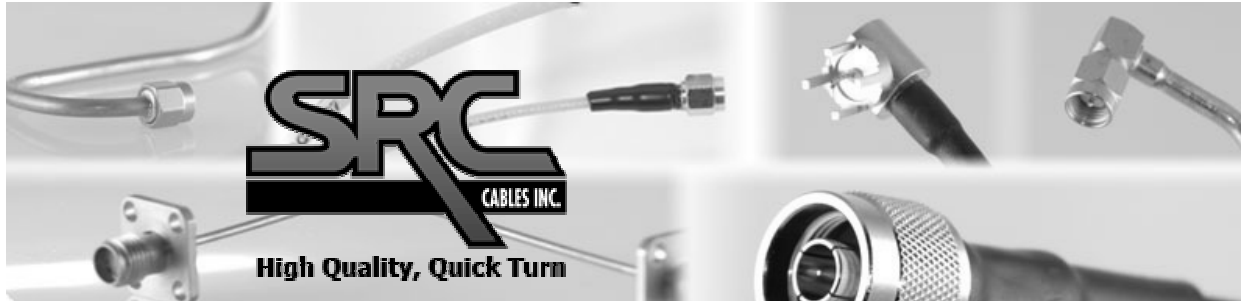

<b>SRC 316-TS (triple shield)</b>		
<b>Center Conductor</b>	SCCS	
Dimension in. (mm)	.0201	(.51)
Dielectric	XLPE	
Shield 1	Al Mylar Tape	.003 (.076)
Shield 2	SC	97% covg.
Shield 3	SC	97% covg.
Jacket	Radox (Yellow)	.115 O.D.
Min. Inside Bend	in. rad	0.30
<b>Impedance</b>	Ohm	50
Capacitance	pF/ft @ 1 GHz	29
Velocity (propogation)	% of c	71
Shielding	dB	110
Max Voltage	vrms	1,500
Power (@ 1GHz)	W	110
Temperature range	°C	-40 +105
Flame rating	UL 1581	
<b>Halogen</b>	IEC 754 approved	
<b>Frequency</b>	<b>Attenuation</b>	<b>Power</b>
	dB/100ft	W
400 MHz	9.0	80
900 MHz	16.5	50
1000 MHz	23.1	50
2 GHz	33.4	10
3 GHz	45.9	10
6 GHz	66.2	10
10 GHz	89.1	10
12 GHz	99.7	10
15 GHz	113.9	10
18 Ghz	127.0	10

All Rights Reserved | © SRC Cables, Inc.  
 5590 Skylane Boulevard, Santa Rosa, CA  
 (707) 573-1900; [info@src-cables.com](mailto:info@src-cables.com)



ERROR: undefined  
OFFENDING COMMAND:

STACK: